


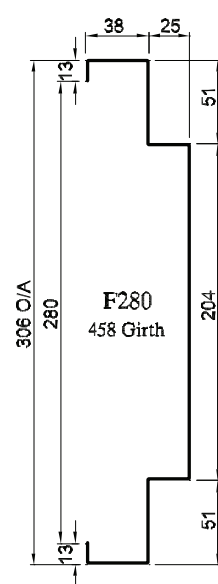
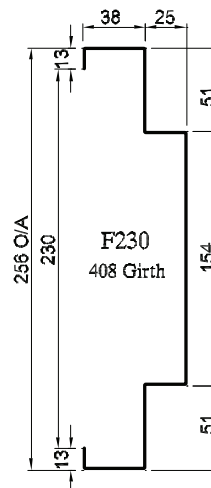


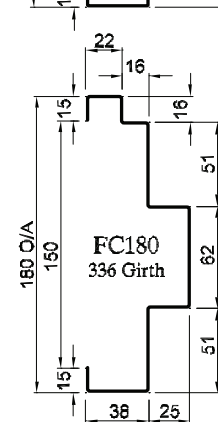
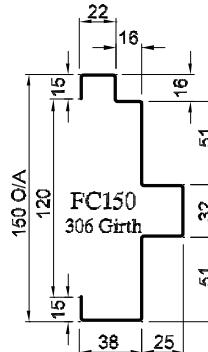


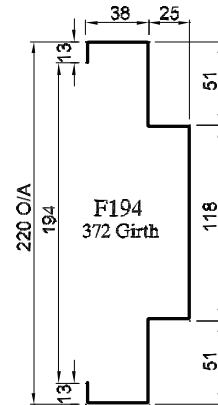




FRAME PROFILES

Fire Rated Frames



HOW TO SPECIFY

"Door frame to be a Pyropanel F117* Prime painted pressed metal door frame. Builder to confirm door frame applicability".

* denotes example - delete, change or specify as required

Note: When installed with appropriate door leaf, frames are fire rated up to 4 hours in masonry walls, and 2 hours in dry wall. Custom frame profiles available on request. Frames are typically 1.2-1.6 zincaneal unless otherwise requested.

Pyropanel Developments Pty Ltd
235 Huntingdale Rd, Oakleigh, Vic 3166
Ph: (03) 9837 8500 Fax: (03) 9837 8550
Email: sales@pyropanel.com.au
Web: www.pyropanel.com.au

Distributed by:
Nexdor Systems
Ph: (03) 5450 3457
Email: estimating@nexdorsystems.com.au
Web: www.nexdorsystems.com.au

