
Issue date: 21-12-2022 Expiry date: 31-12-2023

ASSA ABLOY

Fire rated Meeting Stile

DESCRIPTION


Fire rated meeting stiles suitable for Pyropanel pair fire doors for up to 2 hours of fire rating.

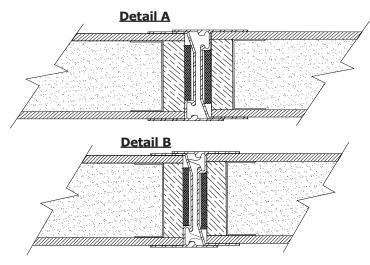

Pyropanel Aluminium J-Section meeting stile (Up to 2 hours of fire rating)


Standard meeting stile of anodised aluminium interlocking J-Section fitted to each leaf. Note: No fin seal required for fire rated applications as per Detail A.

For smoke sealing applications for 1hr, Pyropanel fin smoke seals are used in each meeting stile grooves as per Detail B.



Pyropanel Timber Double-Rebated meeting stile (Up to 1 hour of fire rating)

Timber meeting stile with double-rebated detail and integrated hot smoke seals. Maximum approved pair doors limited to: 2420 x 1020/1020mm or 2200 x 1120/1120mm.

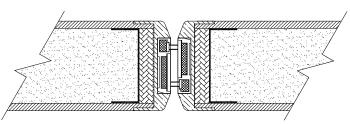

Pyropanel Aluminium Bull-nose meeting stile (Up to 2 hours of fire rating)

Meeting stile of anodised aluminium suitable for single-acting and double-acting fire doors. Meeting stile incorporates an intumescent seal with fin smoke seals.

ASSA ABLOY Australia Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166

Ph: (03) 9837 8500

Email: **sales@pyropanel.com.au**Web: **www.pyropanel.com.au**

Distributed by:

ASSA ABLOY Australia P/L has a policy of continuous improvement and reserves the right to change methods and specifications without notice. Note: The Tech Sheet is an uncontrolled document. If printed please refer to the Tech-Sheet on the website to check if this document is valid.