




EXTERNAL FLUSH PANEL

SPECIFICATION BREAKDOWN

- Custom size doors, up to 3.3m high X 1.6m wide.
- Minimum of 4.75mm skins. Door builds and thicknesses refer to table at bottom right.
- Skin options: Ply, HMR MDF (high moisture resistant)
- Core: Partical Board, Solid Ply
- Internal frame: KDHW 30mm

OPTIONAL EXTRA'S

- Laminate finishes applied to faces
- Solid Timber or Laminate edge strips
- Base seal preps
- Mortise lock preps
- Vent grille cutouts - Framed in KDHW
- Full steel cladding with caps
- Stainless steel kick plates rebated into door face
- RHS verticals inside edge stiles
- Other miscellaneous hardware preps can be requested

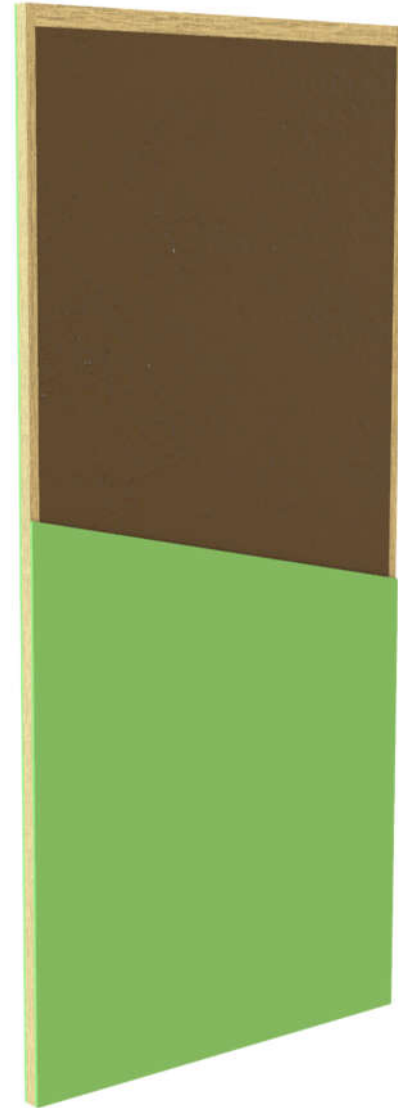

HOW TO SPECIFY

"Nexdor Systems—External

Construction [thickness]mm
thick flush panel.

With [optional extra's required]."

Solid Core PB - EXTERNAL			
Core Th./ Skin Th.	3.2	3.6	6
25	31.4	32.2	37
33	39.4	40.2	45