




BOCKWORK METAL FRAME

SPECIFICATION BREAKDOWN

- To be bricked in with Wire-Tie fixings
- Standard throat width: 114mm
- Custom throat size available
- Zinc Gauge: 1.1mm, 1.5mm, 1.9mm, 2.5mm, 2.95mm
- Welded, Dressed and Primed
- Hinge Preps: 100 x 100mm, 75 x 100mm
- Standard Striker Prep
- Fire Rated or Non Rated
- Must be backfilled with mortar or plaster to achieve fire compliance
- Double or Single rebate

OPTIONAL EXTRA'S

- Galvanised finish
- Prep for powdercoat
- Stainless Steel
- Knock-down construction (weld on site)
- Electric Strike prep
- Backing plate for full-length hinges
- Custom hardware preps

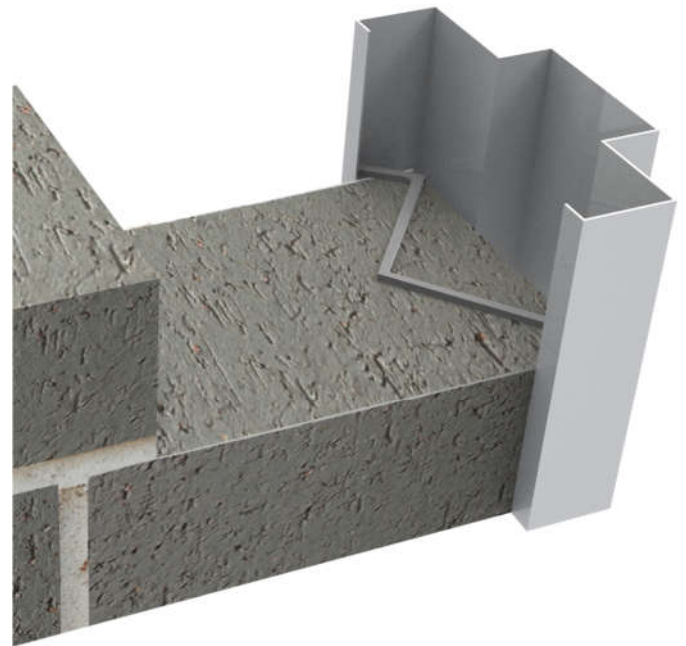

HOW TO SPECIFY

"Nexdor Systems—Blockwork Wall Frame, [throat size]mm throat, [Rated or Non-Rated], [Material Gauge] gauge.

With [optional extra's required]."