




SEMI SOLID FLUSH PANEL

SPECIFICATION BREAKDOWN

- Custom size doors, up to 3.3m high X 1.6m wide. Larger than these require our Kitform™ construction.
- Also referred to as HEAVY WEIGHTS.
- Minimum of 6mm skins. Door builds and thicknesses refer to table at bottom right.
- Skin options: Raw MDF, Pre-Primed MDF, HMR MDF (high moisture resistant)
- Internal frame options (door edge):
 - Hoop pine 30mm + 70mm MDF (100mm total) recommend for hinge prepping and lockset face plates
 - MDF 100mm wide

OPTIONAL EXTRA'S

- Timber veneer finishes to door faces
- Laminate finishes applied to faces
- Solid Timber or Laminate edge strips
- Base seal prep's
- Mortise lock preps
- Vent grille cutouts
- Non-combustible cladding to one side (service cupboard applications)
- Stainless steel kick plates rebated into door face
- RHS verticals inside edge stiles
- Other miscellaneous hardware preps can be requested

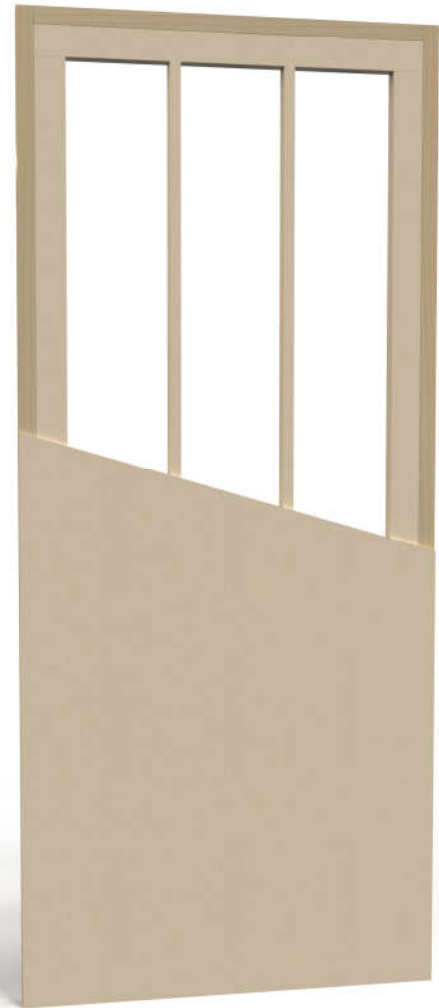

HOW TO SPECIFY

"Nexdor Systems—Semi Solid Construction [thickness]mm thick flush panel.

With [optional extra's required]."

	SEMI SOLID SKIN THICKNESS			
	All dims. in MM	6	9	12
SEMI SOLID CORE THICKNESS	16	N/A	34	40
	18	N/A	36	42
	25	37	43	49
	32	44	50	N/A