

# ACCESSORIES

## Door Closer - LG1500SIL

### DESCRIPTION

Fire Rated adjustable door closer. Certified and tested on fire doors for up to 4 hours.

### APPLICATIONS

Suitable for fire doors and standard doors used in residential and commercial applications.

### FEATURES

- Tested and certified to Australian Standards
- 2 to 6 power adjustable
- Delayed action
- Adjustable back check
- Adjustable latching speed
- Adjustable closing speed
- Overload protection
- Non-Handed
- Standard and Parallel arm brackets included
- Easy to install



### OPTIONAL EXTRAS

- Available with slide track upon request.

### INSTALLATION OPTIONS



#### 1. Standard Arm

Closer installed on pull side of door. This mounting position permits opening of 180°.

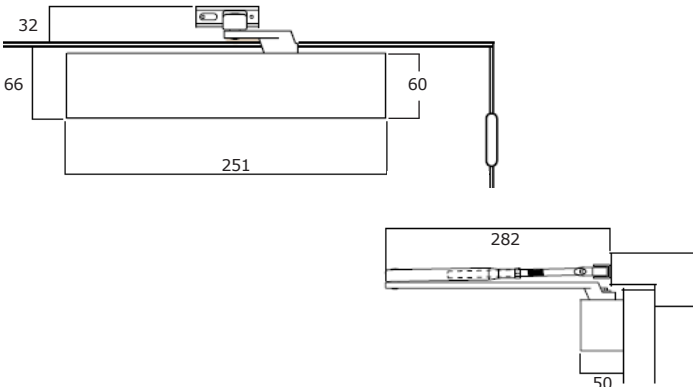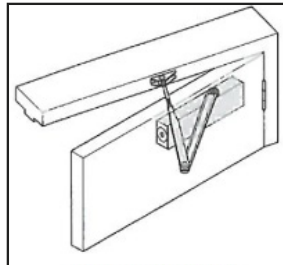



#### 2. Parallel Arm

Closer installed on push side of door. This mounting position permits opening of 180°.

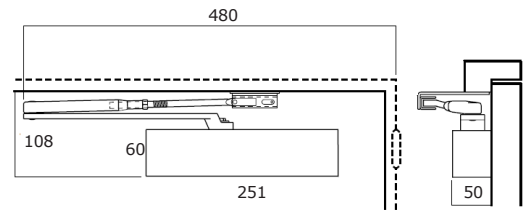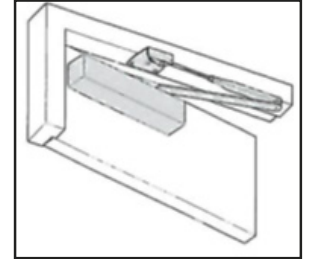


#### 3. Frame Mounting

Closer installed on push side of door and frame head where conditions do not allow parallel mounting.

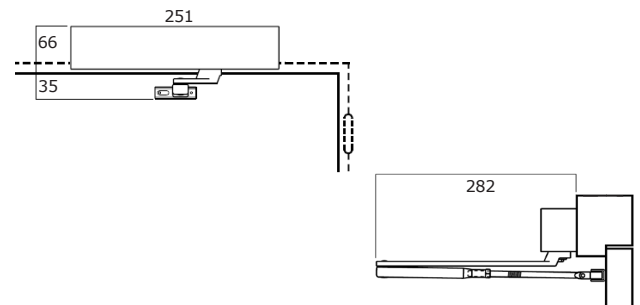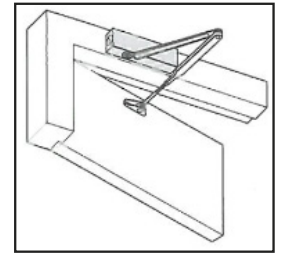

### HOW TO SPECIFY

Eg, "Pyropanel LG1500SIL Fire Rated door closer"

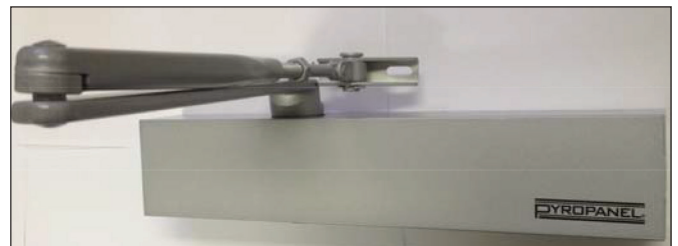

### Pyropanel Developments Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166  
 Ph: (03) 9837 8500 Fax: (03) 9837 8550  
 Email: [sales@pyropanel.com.au](mailto:sales@pyropanel.com.au)  
 Web: [www.pyropanel.com.au](http://www.pyropanel.com.au)

### Distributed by:

**Nexdor Systems**  
 Ph: (03) 5450 3457  
 Email: [estimating@nexdorsystems.com.au](mailto:estimating@nexdorsystems.com.au)  
 Web: [www.nexdorsystems.com.au](http://www.nexdorsystems.com.au)

