HALF-LITE TIMBER GLASS FIRE DOORSETS

NOTE: *Product currently being obsolete. Please check availability with your preferred Pyropanel licensee prior to specifying.*

DESCRIPTION


Glazed Timber Fire doorset utilising the latest Pyropanel fire resistant door core and design technology combined with Pilkington insulating fire rated glass, these doors are approved to AS1530.4:2014 and AS1905.1:2015, and are available in a variety of sizes and finishes for 1 hour fire resistance levels.

APPLICATIONS

Ideal for most applications that require a certified fire door with the added safety and benefits of fire resistant glass, especially in hospitals, schools, car parks, shopping centres, offices, residential complexes, public buildings etc.

FEATURES


- For use in plasterboard stud walls & masonry/concrete walls.
- Paint grade Ply facings as standard.
- Available in singles or pairs.
- Incorporates 18mm Pilkington Pyrostop™ fire rated glass with class-A impact resistance.
- Vision panel limited to maximum height of 1350mm, and area of 0.9m^2.
- Vision panel may be up to 36% of door area.
- Suitable for Pyropanel fire rated steel door frames with 25mm doorstop, or Pyropanel one hour fire rated timber door frame with 25mm doorstop.
- Doors weigh approx 36kg/m^2.

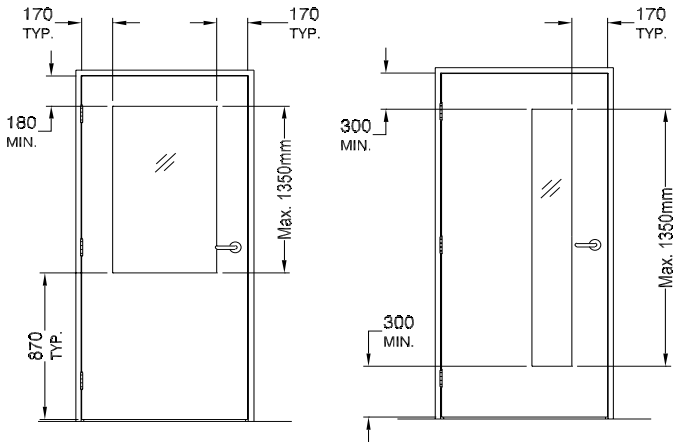

Half-lite

OPTIONAL EXTRAS

- MDF or Ply facings
- Pre-hung in frame (Check availability with your preferred Pyropanel licensed distributor)
- Acoustic options available, see table on page 2 for seal combinations.

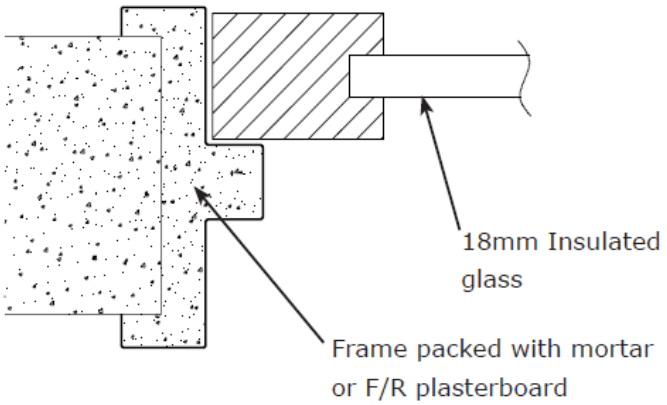

MODELS AVAILABLE

Model	Type	FRL	Thickness (nom.)	Max Leaf size - Single	Max Leaf size - Pair
PG1FD060-54	Half-Lite	-/60/30	54	2420 x 1020*	2420 x 1020*

*Also available as 2200 x 1120

Refer to your preferred Pyropanel Licensed distributor to confirm that chosen hardware is approved.

HOW TO SPECIFY

Eg, "Door to be a Pyropanel PG2FD060-54 Half-Lite Glass Fire Door, 54mm* thick, -/60/30 FRL, Ply faced*, mounted in Pyropanel filled steel door frame*.*

* denotes example - delete, change or specify as required

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Rd, Oakleigh, Vic 3166
Ph: **(03) 9837 8500**
Email: **sales@pyropanel.com.au**
Web: **www.pyropanel.com.au**

Distributed by:

ASSA ABLOY Australia P/L has a policy of continuous improvement and reserves the right to change methods and specifications without notice.
Note: *The Tech Sheet is an uncontrolled document. If printed please refer to the Tech Sheet on the website to check if this document is valid.*

R GLASS FIRE DOORSETS

ACOUSTIC DATA

Model	Door	Door Configuration	Perimeter seal	Bottom Seal	Meeting Stile seals	Rw
PG1FD060-54	Half-Lite	Single	Pyropanel Euroseal	Lorient LAS8001si	N/A	32
		Pair	Pyropanel Euroseal	Lorient LAS8001si	Pyropanel J-section with fin seal	31

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Rd, Oakleigh, Vic 3166
Ph: **(03) 9837 8500**
Email: **sales@pyropanel.com.au**
Web: **www.pyropanel.com.au**

Distributed by:

ASSA ABLOY Australia P/L has a policy of continuous improvement and reserves the right to change methods and specifications without notice.
Note: *The Tech Sheet is an uncontrolled document. If printed please refer to the Tech Sheet on the website to check if this document is valid.*